


034/DSG

- Divisione irregolare dei taglienti
- La particolare geometria consente di ottenere svasature perfettamente cilindriche e senza vibrazioni su molteplici materiali

HSS+Co

DIN 335/C 90°

Ø NOM. mm.	GRADI	PER VITE A TESTA SVASATA	Ø MINIMO mm.	Ø CODOLO mm.	LUNG. TOT. mm.	€	TiAlN €
6,3	90°	M 3	1,5	5	45		
8,3	90°	M 4	2	6	50		
10,4	90°	M 5	2,5	6	50		
12,4	90°	M 6	2,8	8	56		
15	90°		3,2	10	60		
16,5	90°	M 8	3,2	10	60		
20,5	90°	M 10	3,5	10	63		
25	90°	M 12	3,8	10	67		
28	90°	M 14	4	12	71		
31	90°	M 16	4,2	12	71		

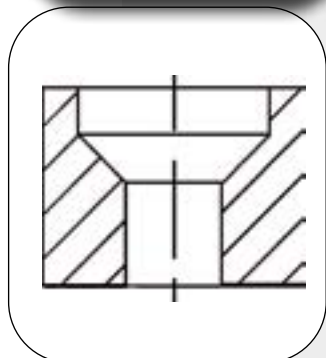

NOVITÀ



KIT	DIAMETRO	€	TiAlN €
K234DSG	6,3 - 8,3 - 10,4 - 12,4 16,5 - 20,5 - 25		
K234DSG/TA	6,3 - 8,3 - 10,4 - 12,4 16,5 - 20,5 - 25		